


LOS ANGELES DATA CENTER - LAX014

3690 Redondo Beach Avenue, Redondo Beach, CA 90278

BETTER ENGINEERED COLOCATION

OFFERED IN MORE THAN 50 CONVENIENT LOCATIONS WORLDWIDE,
INAP'S COLOCATION SOLVES TOMORROW'S BUSINESS NEEDS TODAY

- ✔ **Premium Data Centers**
Backed by a proactive 100% uptime SLA, INAP facilities offer 18x more availability than N+1 alone
- ✔ **Enhanced Connectivity**
Carrier neutral meet me rooms supplement INAP's industry leading Performance IP™ and enable connections to a host of third party services
- ✔ **Future Proof Services**
Add scale on demand by consuming up to 20kW in a single cabinet or by leveraging INAP's bare metal and cloud options
- ✔ **Award Winning Support**
Colocation and Network Engineers are on site and ready to assist 24 hours a day, 7 days a week, 365 days a year

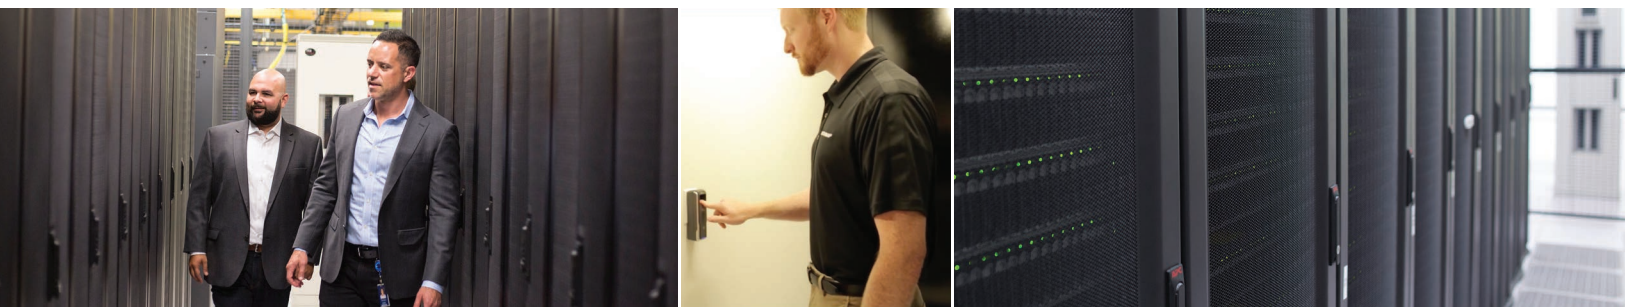

1 877.843.7627 | contactsales@INAP.com | INAP.com

LOS ANGELES DATA CENTER

Location and Site Information

Address	3690 Redondo Beach Ave. Redondo Beach, CA 90278
Total Space	100,700 square feet
Floor Type	Antistatic raised floor
Loading Dock	Easy access for all size trucks
Roof Rights	Yes
Number of Entrance Vaults	PME-UTIL-1
NPA / NXX	424-236

Site Structure

DC Build Year / Year Started	2012
Number of Floors	1
Structure Type	Structural steel, reinforced concrete
Exterior Type	Concrete
Seismic Rating	Zone IID
Earthquake Resistance	Built to 1.5 importance factor
Ceiling Clearance	14 feet
In Flood Plain	No

Fire Protection

Smoke/Heat Detection (VESDA), Sub-Floor Detection and Remotely Monitored	
Wet or Pre-action	Pre-action
Number of Zones	2

Environmental Control

Cooling Capacity	(2) 150-ton air-cooled screw chillers, expandable to (11) 400- ton centrifugal chillers with thermal storage capability
Cooling Type	Chilled water with airside economizer
Redundancy	N+1 with concurrent maintainability
Heating Type	None
Humidification	Ultrasonic

Security

CCTV, Intrusion Detection, On-site Guards	
CCTV Recorded	Up to 90 days
Card Access	HID proximity card readers / biometrics
Access Control	Biometric and card reader

Power

Harmonic Filters, Remotely Monitored	
Electric Utility	Southern California Edison
Power Utility Service	5.0 MW
Redundant Power Feed	Yes
Backup Generator	(2) MTU/Detroit Diesel expandable to (11)
UPS	(2) APC, expandable to (11)
UPS Size(s)	1.4 MW each
Battery Type	VRLA, valve-regulated lead-acid battery
Battery Life at Full Load	15 minutes
Electrical Infrastructure Redundancy	N+1 with Concurrent Maintainability

Carrier-Neutral Meet-Me-Room

AT&T	Time Warner Business
Time Warner Cable	Zayo

Performance IP™ Mix

AT&T	Cogent
Comcast	NTT
Telia	Verizon
Zayo	

Low latency Layer 2 connectivity to over 200 carriers available at One Wilshire.