






HOUSTON DATA CENTER-HOU

1301 Fannin Street, Suite 1100, Houston, TX 77002

BETTER ENGINEERED COLOCATION

OFFERED IN MORE THAN 50 CONVENIENT LOCATIONS WORLDWIDE,
INAP'S COLOCATION SOLVES TOMORROW'S BUSINESS NEEDS TODAY

-  **Premium Data Centers**
Backed by a proactive 100% uptime SLA, INAP facilities offer 18x more availability than N+1 alone
-  **Future Proof Services**
Add scale on demand by consuming up to 20kW in a single cabinet or by leveraging INAP's bare metal and cloud options
-  **Enhanced Connectivity**
Carrier neutral meet me rooms supplement INAP's industry leading Performance IP™ and enable connections to a host of third party services
-  **Award Winning Support**
Colocation and Network Engineers are on site and ready to assist 24 hours a day, 7 days a week, 365 days a year

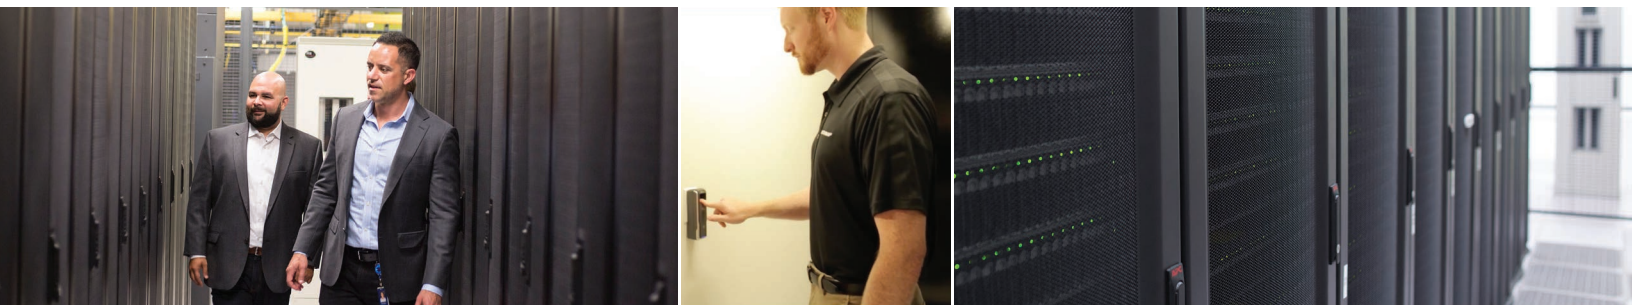

1 877.843.7627 | contactsales@INAP.com | INAP.com

HOUSTON DATA CENTER

Location and Site Information

Address	1301 Fannin St. Suite 1100 Houston, TX 77002
Total Space	41,000 square feet
Floor Type	Antistatic raised floor
Loading Dock	Trucks up to 26'
Roof Rights	Yes
Number of Entrance Vaults	2
NPA / NXX	713 -752

Site Structure

DC Build Year	1999
Number of Floors	26
Structure Type	Structural steel, reinforced concrete, pre-cast concrete
Exterior Type	Marble, pre-cast concrete, glass
Seismic Rating	Zone 0
Ceiling Clearance	16' clearance on IT floor
In Flood Plain	No

Fire Protection

Smoke / Heat Detections, Remotely Monitored	
Wet or Pre-action	Both
Number of Zones	36

Environmental Control

Cooling Capacity	(4) 1200 ton York cooling towers
Cooling Type	Chilled water
Redundancy	N+1
Heating Type	(2) Cleaver Boroks/672BTUs
Humidification	Ultrasonic

Security

CCTV	Yes - 22 cameras
CCTV Recorded	Up to 90 Days
Intrusion Detection	Yes
On-site Guards	24/7
Card Access	HID proximity card readers
Access Control	Biometric & keypad

Power

Harmonic Filters, Remotely Monitored	
Electric Utility	Reliant (Centerpoint)
Power Utility Service	Quad (4) Transformer Substations
Redundant Power Feed	Yes
Backup Generator	(3) Caterpillar generators
Generator Size(s)	(3) 2.0 MW
Generator Fuel	Diesel
UPS	(5) Liebert/GE/APC
UPS Size(s)	(1) 650 kVA / (3) 500 kVA / (1)1200kVA
Battery Type	Lead Calcium (gel cell) / VRLA
Battery Life at Full Load	20 minutes
Electrical Infrastructure Redundancy	N+1

Carrier-Neutral Meet-Me-Room

Abovenet	Alpheus
AT&T	CenturyLink
Cogent	Comcast
Comcast Business	FiberLight
Level 3	Logix
On-Fiber	Phonoscope
SBC (SW Bell)	Time Warner
Time Warner Telecom	Verizon
XO	

Performance IP™ Mix

Global Crossing	Verizon
XO Communications	Zayo (Abovenet)